

Pressure Gauges

APPLICATION


Pressure testing of high and low pressure plumbing systems

SPECIFICATIONS

- **GHP:** 0 - 2500 kPa (367 psi) pressure range
Supplied with 15mm and 20mm female connectors
Oil filled
- **GLP:** 0 - 250kPa (35 psi) pressure range
Supplied with tapered rubber plug
Exceeding 250 kPa will void warranty

PRODUCT CODES

GHP Gauge High pressure
GLP Gauge Low pressure

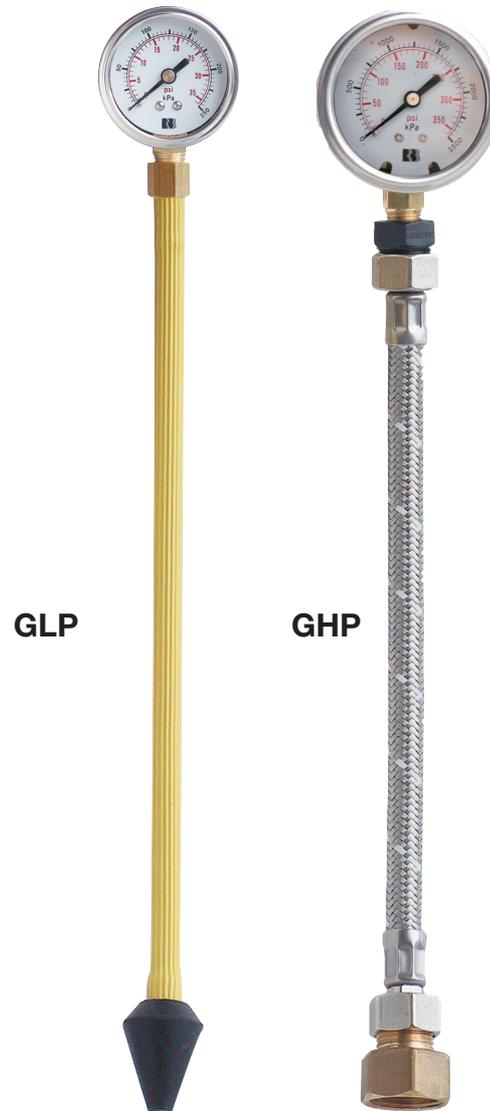

GLP

GHP

Urn Tap

APPLICATION

Tap for dispensing boiling water

SPECIFICATIONS

- Length: 75mm
- Silicone rubber diaphragm
- Locknut to conceal inlet thread
- Nylon washer
- Chrome plated finish
- Maximum temperature 100°C
- 1 year warranty
- DR (Dezincification Resistant) brass

PRODUCT CODES

UT 15 15mm

SERVICE PARTS

UTD Urn Tap Diaphragm
UTT ASSY Urn Tap Top Assembly

